


# Trimod<sup>®</sup>Besta

**Trimod Besta Füllstandscharter**  
**Trimod Besta Level Switch**  
**Trimod Besta Contrôleur de niveau**

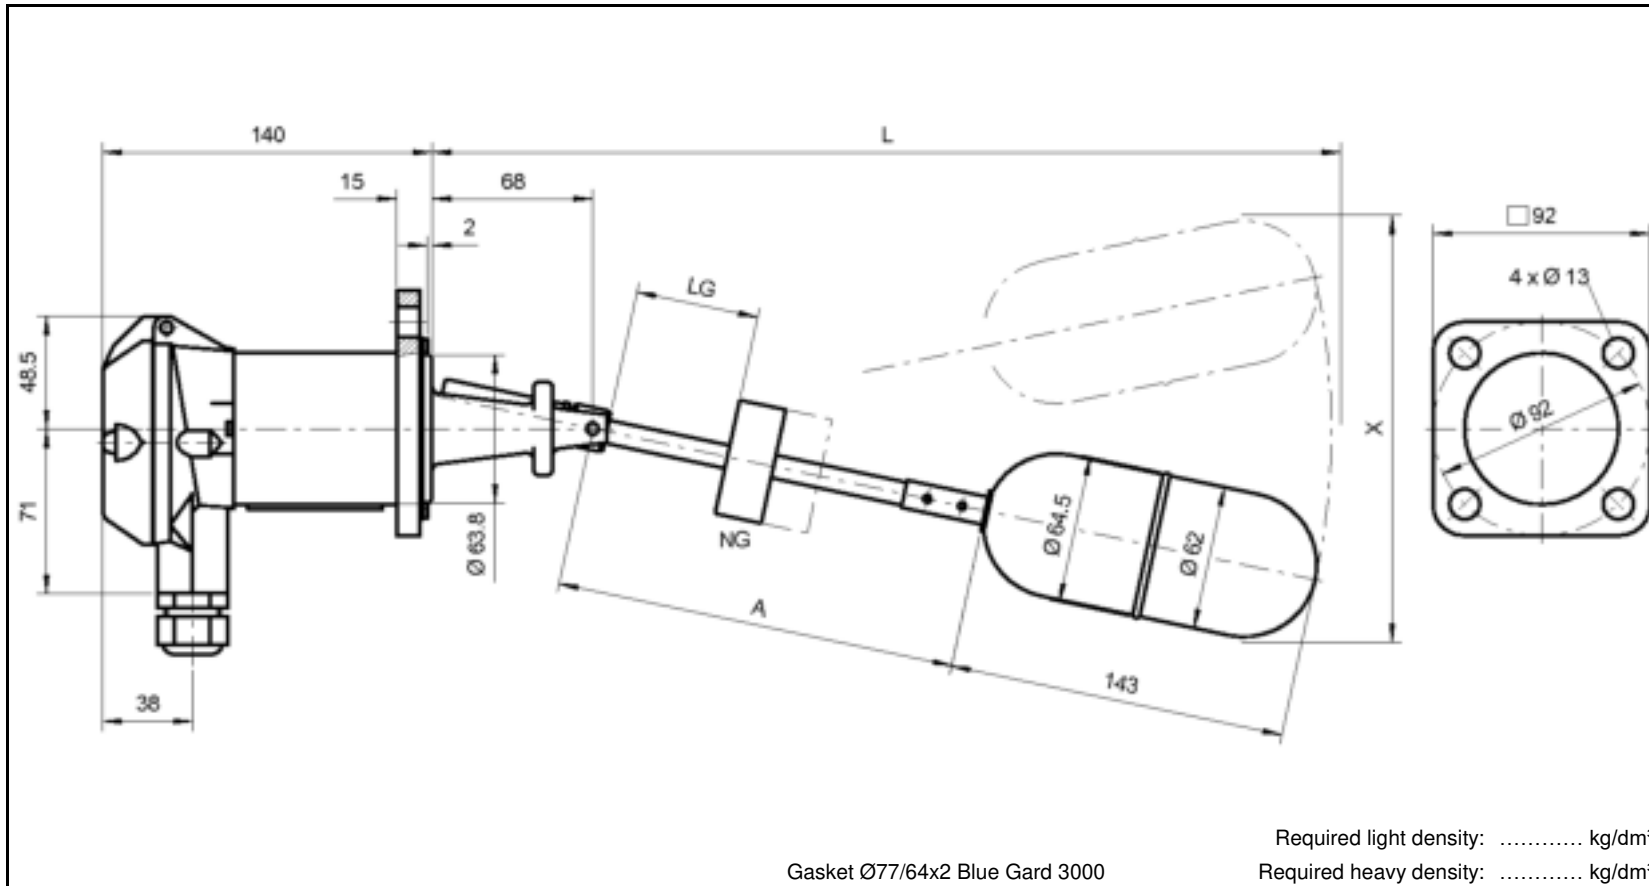

Safety Integrity Level: **SIL 1**  
**(SIL 3 capable)**

Dimensionen / Dimensions mm			
A			
LG			
NG			
L			
X			

Ship register certificate:  
 ABS, BV, DNV-GL, LR, RINA, RS, ClassNK

Überwurfflansch  
 Slip-on flange --  
 Bride folle  
 Schmelze / Heat no:

Bachofen-Nr. / Bachofen no:

Dichteinheit / Fixflansch  
 Sealing unit / Fixed flange 1.4408  
 Unité d'étanchéité / Bride fixe

Schmelze / Heat no:

Bachofen-Nr. / Bachofen no:

Schwimmer  
 Float 1.4571  
 Floteur

Gasket Ø77/64x2 Blue Gard 3000

Required light density: ..... kg/dm<sup>3</sup>

Required heavy density: ..... kg/dm<sup>3</sup>

Typ Type Type	<b>A 01 08T1</b> (Art. no. ....)	Schaltmodul Switch module Module de commande	<b>A</b>	Flanschmodul Flange module Module de bride	<b>01</b>	Schwimmermodul Float module Module de flotteur	<b>08T1</b>
Betriebstemperatur Operating temp. Temp. de service	0 to 300°C	Gehäusematerial Housing material Matériau boîtier	Aluminium Sea water resistant	Nenn- / -weite Nom. Pressure / -Diameter Pression- / Section Nominal	PN 25	Schaltdifferenz Operating diff. Différentiel	..... mm
Umgebungstemp. Ambient temp. Temp. d'ambiance	0 to 70°C	Kabeleinführung Cable entry Presse-étoupe	M20 x 1.5	Norm Standard Norme	Besta	Dichte max. / min. Density max. / min. Densité max. / min.	≤ ..... kg/dm <sup>3</sup> ≥ ..... kg/dm <sup>3</sup>
Schaltleistung Switch rating Pouvoir de coupure	5A / 250VAC 5A / 30VDC	Schutzart Enclosure Cl. de protection	IP65	Dichtungsart Flange Facing Type d'étanchéité	Raised face	Nenn- / Prüfdruck Nominal / Test press. Pression nominale / d'épreuve	PN 25 bar PP 38 bar

Order no.  
 Stk./ pcs./quant.  
 Date/Visa 02.10.15 / SIA



Bachofen AG, Ackerstrasse 42  
 CH-8610 Uster/Switzerland  
 Phone +41 44 944 11 11  
 Fax +41 44 944 12 33  
 info@trimodbesta.com  
 www.trimodbesta.com 011015/TSI