


Trimod[®]Besta

Trimod Besta Füllstandschalter

Trimod Besta Level Switch

Trimod Besta Contrôleur de niveau

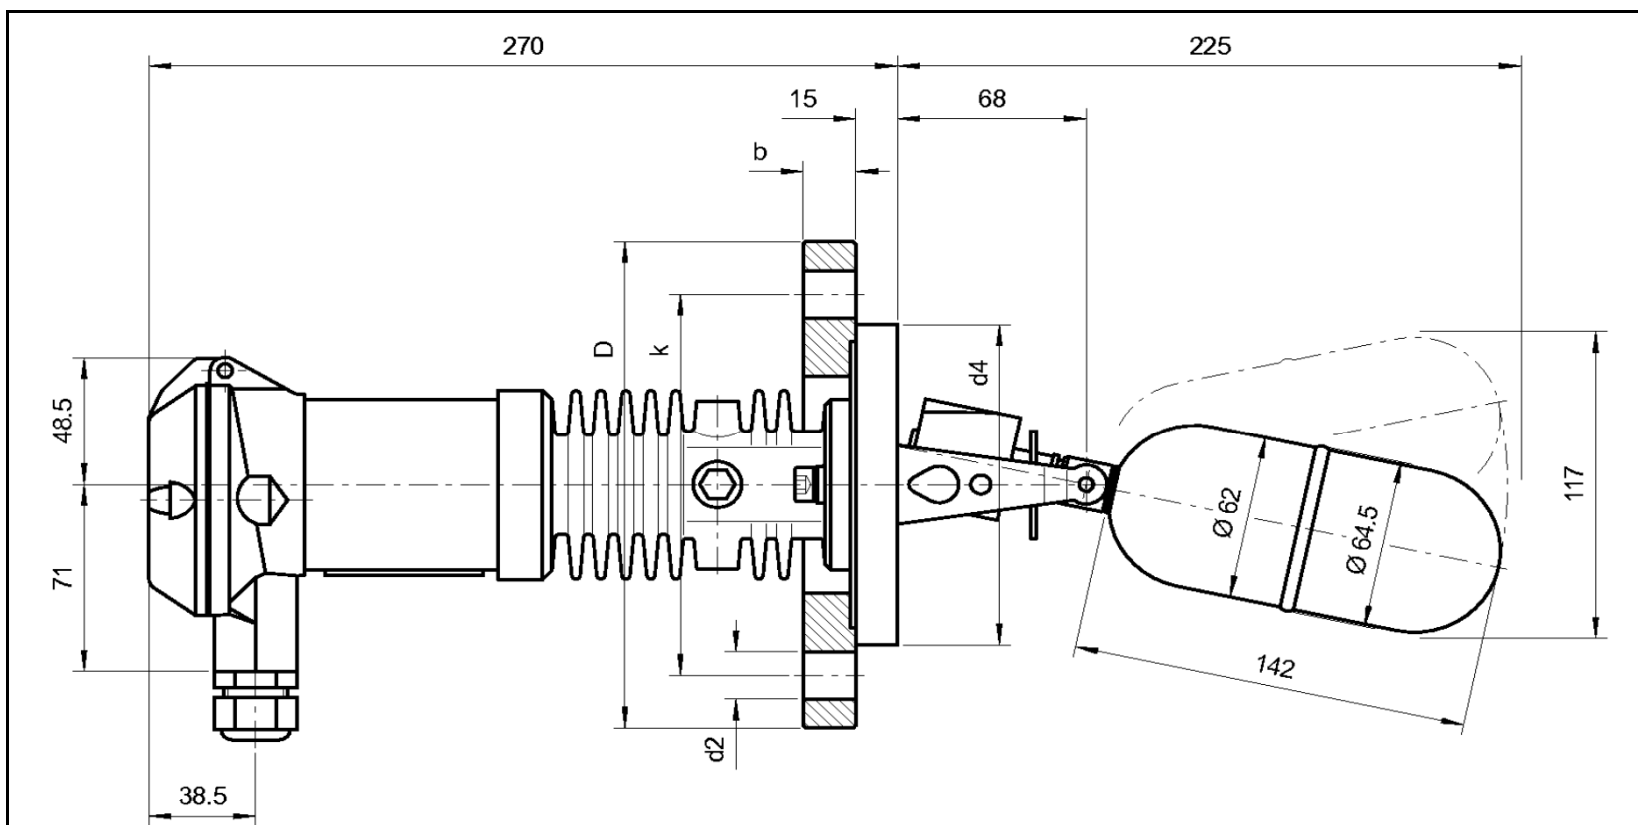

Safety Integrity Level:		SIL 1	
Dimensionen / Dimensions mm			
D	220		
b	27		
k	170		
d2	26		
Anz./no	8		
d4	122		
Überwurfflansch Slip-on flange Bride folle		1.0425 (P265GH)	
Schmelze / Heat no:			
Bachofen-Nr. / Bachofen no:			
Dichteinheit Sealing unit Unité d'étanchéité		1.4571	
Schmelze / Heat no:			
Bachofen-Nr. / Bachofen no:			
Schwimmer Float Flotteur		1.4571	
Order no.			
Stk./ pcs./quant.			
Date/Visa		12.06.17 / TSI	
BACHOFEN Industrial Automation Bachofen AG, Ackerstrasse 42 CH-8610 Uster/Switzerland Phone +41 44 944 11 11 Fax +41 44 944 12 33 info@trimodbesta.com www.trimodbesta.com 011015/TSI			

Type	HA 24E 02	Schaltmodul	HA	Flanschmodul	24E	Schwimmermodul	02
Type		Switch module		Flange module		Float module	
Type	(Art. no. A415833)	Module de commande		Module de bride		Module de flotteur	
Betriebstemperatur		Gehäusematerial	Aluminium chromated	Nenndruck / -weite	PN 100	Schaltdifferenz	
Operating temp.	0 to 400°C	Housing material	Sea water resistant	Nom. Pressure / -Diameter	DN 65	Operating diff.	12 mm
Temp. de service		Matériau boîtier		Pression- / Section Nominal		Différentiel	
Umgebungstemp.		Kabeleinführung		Norm		Dichte min.	
Ambient temp.	0 to 135°C	Cable entry	M20 x 1.5	Standard	EN 1092-1	Density min.	0.700 kg/dm³
Temp. d'ambiance		Presse-étoupe		Norme		Densité min.	
Schaltleistung		Schutzart		Dichtungsart		Prüfdruck	
Switch rating	5A / 250VAC	Enclosure	IP65	Flange Facing	Form B2	Test pressure	150 bar
Pouvoir de coupure	5A / 30VDC	Cl. de protection		Type d'étanchéité		Pression d'épreuve	

011015/TSI